

## MOBILE LINE

A wide range of resistant and tough mobile light towers with high quality standards. This range is made-up of light towers equipped with different kinds of road or site-tow trailers, for use in the most hard working environments. The smallest models are equipped with a practical manual hand trolley allowing a single operator to manoeuvre quickly and safely. They are ideal for use in areas where lighting needs to be frequently repositioned.



## SPECIAL LINE

Generac Mobile® does take requests for specially designed models and will evaluate the viability of those requests on a case-by-case basis. Also available are a range of alternative products, such as light towers with double telescopic mast, extended height masts up to 20 metres and models placed on vehicles, skids or other special trailers.



**GENERAC** | MOBILE

**Generac Mobile Products Srl**  
Part of Generac Power Systems, Inc.  
Via Stazione, 3 bis - 27030 Villanova d'Ardenghi (PV) - Italy  
Tel +39.0382.567011 - gmp.srl@generac.com  
www.towerlight.com | www.generacmobile.com

# LIGHT TOWERS

EN\_TLFOLD\_1903\_03.3

**GENERAC** | MOBILE

## GREEN LINE

Generac Mobile® is always looking for new, environmentally friendly solutions and that is what led us to create a specific line of light towers equipped with hybrid or full battery technologies. The machines in this innovative line present considerable advantages in terms of fuel savings, noise reduction and CO<sub>2</sub> emissions.



## STATIONARY LINE

A range of static light towers that can be mounted on a base or fastened horizontally or vertically on a fixed structure like a container. Silent and compact models with different mast heights and floodlight options, these light towers ensure high versatility in different working areas. Ideal solution for fixed position use.



**V20 Hybrid**

- Height: 8,5 m
- Floodlights: 4x150W or 4x300W LED
- Running time: 320+ hours (4x150W @100%)
- GTL01 digital controller
- Site-tow or road trailer
- Dimmable light power
- Lithium battery
- Engine: Yanmar L100N
- Illuminated area: up to 4200 m<sup>2</sup>

**VT-Hybrid**

- Height: 8,5 m
- Floodlights: 4x150W LED
- Running time: 650+ hours
- MPnano digital controller
- Site-tow or road trailer
- Engine: Yanmar L70N
- Illuminated area: 2500 m<sup>2</sup>

**CUBE+ Hybrid**

- Height: 8,4 m
- Floodlights: 4x150W LED
- Running time: 700+ hours
- MPnano digital controller
- Mounted on base
- Top accessibility
- Engine: Yanmar L70N
- Illuminated area: 2500 m<sup>2</sup>

**CUBE+ NEXT**

- Height: 8,4 m
- Floodlights: 4x150W or 4x300W LED
- Running time: up to 112 h
- Mounted on base
- Dimmable light power
- Full battery technology
- Illuminated area: up to 4200 m<sup>2</sup>

**Hydro Power Box Hybrid**

- Height: 8,3 m
- Floodlights: 4x150W LED
- Running time: 1200+ hours
- MPnano digital controller
- Vandalism-proof for events
- Top accessibility
- Engine: Yanmar L70N
- Illuminated area: 2500 m<sup>2</sup>

**V20**

- Height: 8,5 m
- Floodlights: 4x320W LED
- Hydraulic lifting system
- GTL01 digital controller
- Site-tow or road trailer
- Engine: Kubota Z482
- Illuminated area: 4500 m<sup>2</sup>

**V20 HYPER**

- Height: 8,5 m
- Floodlights: 4x320W LED
- Omnia® LED Technology
- GTL01 digital controller
- Site-tow or road trailer
- Engine: Kubota Z482
- Illuminated area: 4200 m<sup>2</sup> (LED @360°)  
4500 m<sup>2</sup> (LED @180°)

**iQ20**

- Height: 8,5 m
- Floodlights: 4x320W LED
- GTL01 digital controller
- Site-tow or road trailer
- Engine: Yanmar L70N
- Illuminated area: 4500 m<sup>2</sup>

**VT-Mine**

- Height: 8,5 m
- Floodlights: 6x320W LED
- Hydraulic lifting system
- GTL01 digital controller
- Special for mining sector
- Engine 1: Kubota D1105
- Engine 2: Perkins 430D-11
- Illuminated area: 5200 m<sup>2</sup>

**VT8**

- Height: 8 m
- Floodlights: 4x1000W MH
- Manual lifting system
- Site-tow or road trailer
- Engine 1: Kubota D1105
- Engine 2: Yanmar 3TN
- Engine 3: Perkins 430D-11
- Illuminated area: 4200 m<sup>2</sup>

**VMAX**

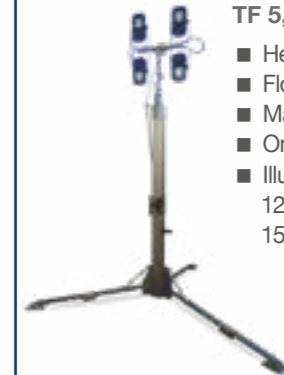
- Height: 8 m
- Floodlights: 6x320W LED
- Manual lifting system
- Reinforced frame
- Liquid containment tank
- Long running time
- Engine: Perkins 403D-11
- Illuminated area: 5200 m<sup>2</sup>

**VTevo**

- Height: 8 m
- Floodlights: 4x320W LED
- Manual lifting system
- Compact shape
- Engine 1: Kubota Z482
- Engine 2: Yanmar L70N
- Illuminated area: 4500 m<sup>2</sup>

**TF 5,5/7**

- Height: 5,5 m or 7 m
- Floodlights: 4x65W LED
- Manual lifting system
- On tripod
- Illuminated area: 1200 m<sup>2</sup> (5,5 m)  
1500 m<sup>2</sup> (7 m)

**Linktower T3**

- Height: 6,7 m
- Floodlights: 4x185W or 1x400W LED
- Manual lifting system
- Linkable in series
- ATEX version available
- 400W UFO version available
- Illuminated area: 2500 m<sup>2</sup> (LED)  
2200 m<sup>2</sup> (ATEX)  
1000 m<sup>2</sup> (UFO LED)

**MT1**

- Height: 5,3 m
- Floodlights: 4x185W or 1x400W LED
- Manual lifting system
- Extremely compact
- Road trailer or hand trolley
- 400W UFO version available
- Engine: Yanmar L70N
- Illuminated area: 2100 m<sup>2</sup> (LED)  
850 m<sup>2</sup> (UFO LED)

**MT2**

- Height: 5,5 m
- Floodlights: 4x185W LED
- Manual lifting system
- Extremely compact
- Hand trolley
- Engine 1: Yanmar L70N
- Engine 2: Honda GX270
- Illuminated area: 2100 m<sup>2</sup>

**CTF 5 & CTF 5,5/7/9**

- Height: 5 m or 5,5/7/9 m
- Floodlights: 4x185W LED (CTF 5)  
4x65W LED (CTF 5,5/7/9)
- Manual lifting system
- Fastening on base (CTF 5)
- Fastening on side (CTF 5,5/7/9)
- Illuminated area: 2100 m<sup>2</sup> (CTF 5)  
1200 m<sup>2</sup> (CTF 5,5)  
1500 m<sup>2</sup> (CTF 7)  
1800 m<sup>2</sup> (CTF 9)

**CUBE+**

- Height: 8,4 m
- Floodlights: 4x1000W MH or 4x320W LED
- Hydraulic lifting system
- GTL01 digital controller
- Tradition: Kubota D1105 engine
- Super: Kubota Z482 engine
- Empty: without engine
- Illuminated area: 4200 m<sup>2</sup> (MH)  
4500 m<sup>2</sup> (LED)

**CUBE+ HYPER**

- Height: 8,4 m
- Floodlights: 4x320W LED
- Omnia® LED Technology
- GTL01 digital controller
- Hydraulic lifting system
- Engine: Kubota Z482
- Illuminated area: 4200 m<sup>2</sup> (LED @360°)  
4500 m<sup>2</sup> (LED @180°)

**Hydro Power Box 360**

- Height: 8,3 m
- Floodlights: 4x1000W MH or 4x320W LED
- Omnia® LED Technology
- Hydraulic lifting system
- GTL01 digital controller
- Vandalism-proof for events
- Tradition: Kubota D1105 engine
- LED 360: Kubota Z482 engine
- Empty: without engine
- Illuminated area: 4200 m<sup>2</sup> (MH)  
4200 m<sup>2</sup> (LED @360°)  
4500 m<sup>2</sup> (LED @180°)

**CTF 10**

- Height: 10 m
- Floodlights: 4x185W or 4x320W LED
- Manual lifting system
- Extremely compact
- Without engine
- Illuminated area: 3600 m<sup>2</sup> (4x185W LED)  
5000 m<sup>2</sup> (4x320W LED)

